

## SR 02 EV Pressure Regulator

### Technical Features



Material	Aluminum HR
Treatment	Anodized (4 color of your choice)
Input Pressure	From 1 to 16 MPa
Output Pressure	Adjustable (see configuration)
Gauges	Low Pressure (ø25 mm)
Solenoid Valve	NC Inside
Safety (*)	APV <sup>2</sup> Overpressure + Temp. Switch
Connect. Cartridge	5/8 - 18 UNF (see configuration)
Output	1/8" F
Flow Rate	15 NL/min
Weight	240/600 g (8,5 oz / 1,32 lb) actual weight varies by configuration


(\*) The pressure reducers are not to be understood as a safety accessory according to PED Directive (2014/68/CE)

### Configuration (order code)

Solenoid Valve	Output	Connection	Gauges	Material	Color
<b>9055 1</b>	<b>4</b>	<b>-E</b>	<b>1</b>	<b>1</b>	<b>G</b>
1-12VAC	1-1,5 Bar	A-M10x1	0-No	1-AL7075	B-Black
2-24VDC	2-2,5 Bar	B-M10x1,5	1-LP	2-AISI 316	G-Grey
3-115VAC	4-4,0 Bar	C-M11x1		3-OT58	R-Red
4-230VAC	6-6,0 Bar	D-5/8-18			T-Turquoise
5-12VDC		E-21,8x1/14"			
		F-.825" 14			



4 Color of your choice

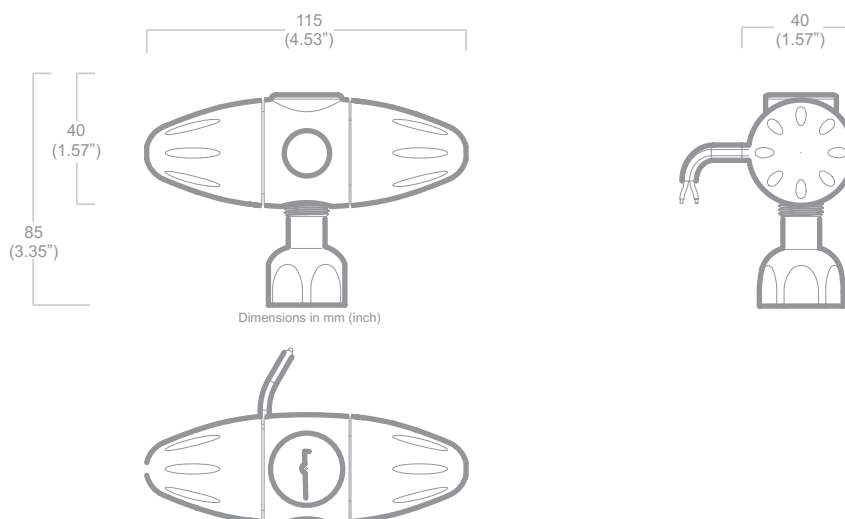

The pressure reducers SR series are:

- Complies to EU Regulations (EC) No. 1935/2004 and (EU) No. 10/2011 regarding the certification of the materials in contact with food (Food Contact Compliance).